

Technical Details


- Dimensions: 149 x 63 x 85.6mm
- Ports: G1/4"
- LED Hole: 5mm

Box Contents

- | | |
|---------------------|------------------------|
| 1x D5 Bay Reservoir | 2x Aluminium Faceplate |
| 1x 5mm LED | 4x Faceplate Screws |
| 4x M3 Screws | 1x Handcuff Bracket |
| 1x M20 Fill Cap | 10x Bracket Screws |



1. If you are using a complete D5 pump, first turn the screw ring anti-clockwise to remove the front of the D5 pump. You should also remove the o-ring.

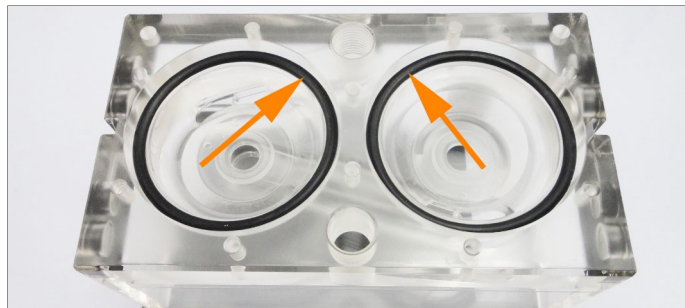

2. Place the o-rings into the groove on the back of the reservoir.



3. Position the pump over the o-rings on the back of the reservoir.




4. Place the handcuff bracket over the back of the two pumps.



5. Use the ten bracket screws to attach the pumps to the reservoir. You should fit all the screws loosely before fully tightening them.



6. Attach your chosen barbs/fittings to the G1/4" inlet and outlet ports. Now attach the tubing and clips.

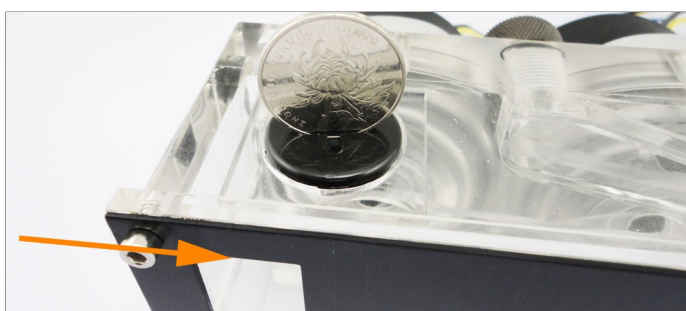

7. The fill cap can be removed using a small coin and turning the cap anti-clockwise. With the fill cap removed fill the reservoir with coolant until it reaches just above the top of the coolant level window. You will have to keep topping up the reservoir as the air bleeds from the loop.



8. The dial on the back of the pump can be used to set the pump speed. 5 being full power and 1 being the lowest noise level. The speed setting on each pump should be matched.